



CONNECT RANGE



Connect system benefits


▶ Evolution of Energy Test devices

▶ Wi-Fi connectivity

▶ No control unit or other peripherals required

▶ Dedicated software tools designed to deliver a 360° experience

▶ Arya: smart features with environmental sensors for safe comfort

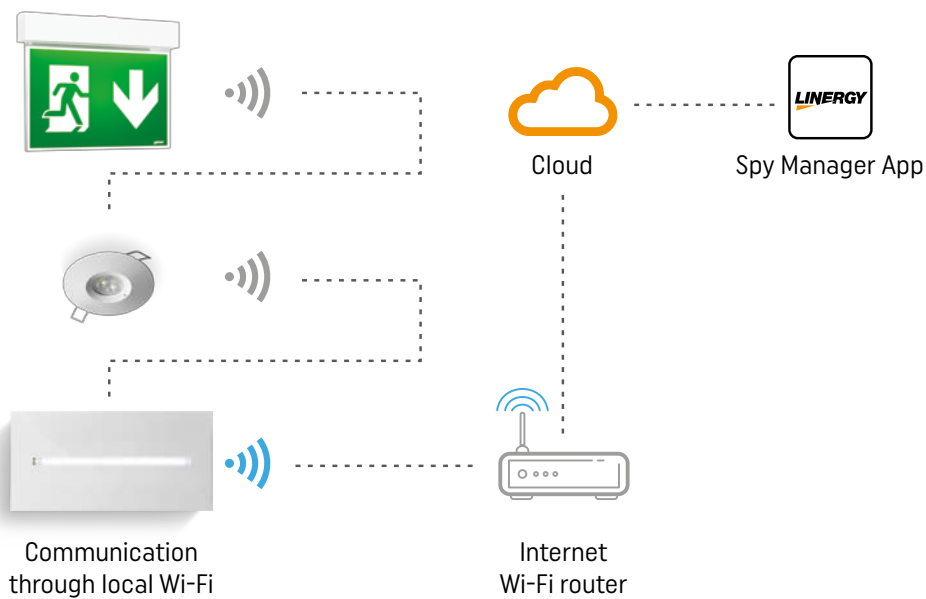

Connect

Self-contained devices with **Wi-Fi connectivity** and self-diagnosis function, always remotely monitorable via **Cloud Linergy**.



Wi-Fi connection



Self testing



Rest Mode




ON/OFF/Dimming



Linergy Cloud



Linergy App

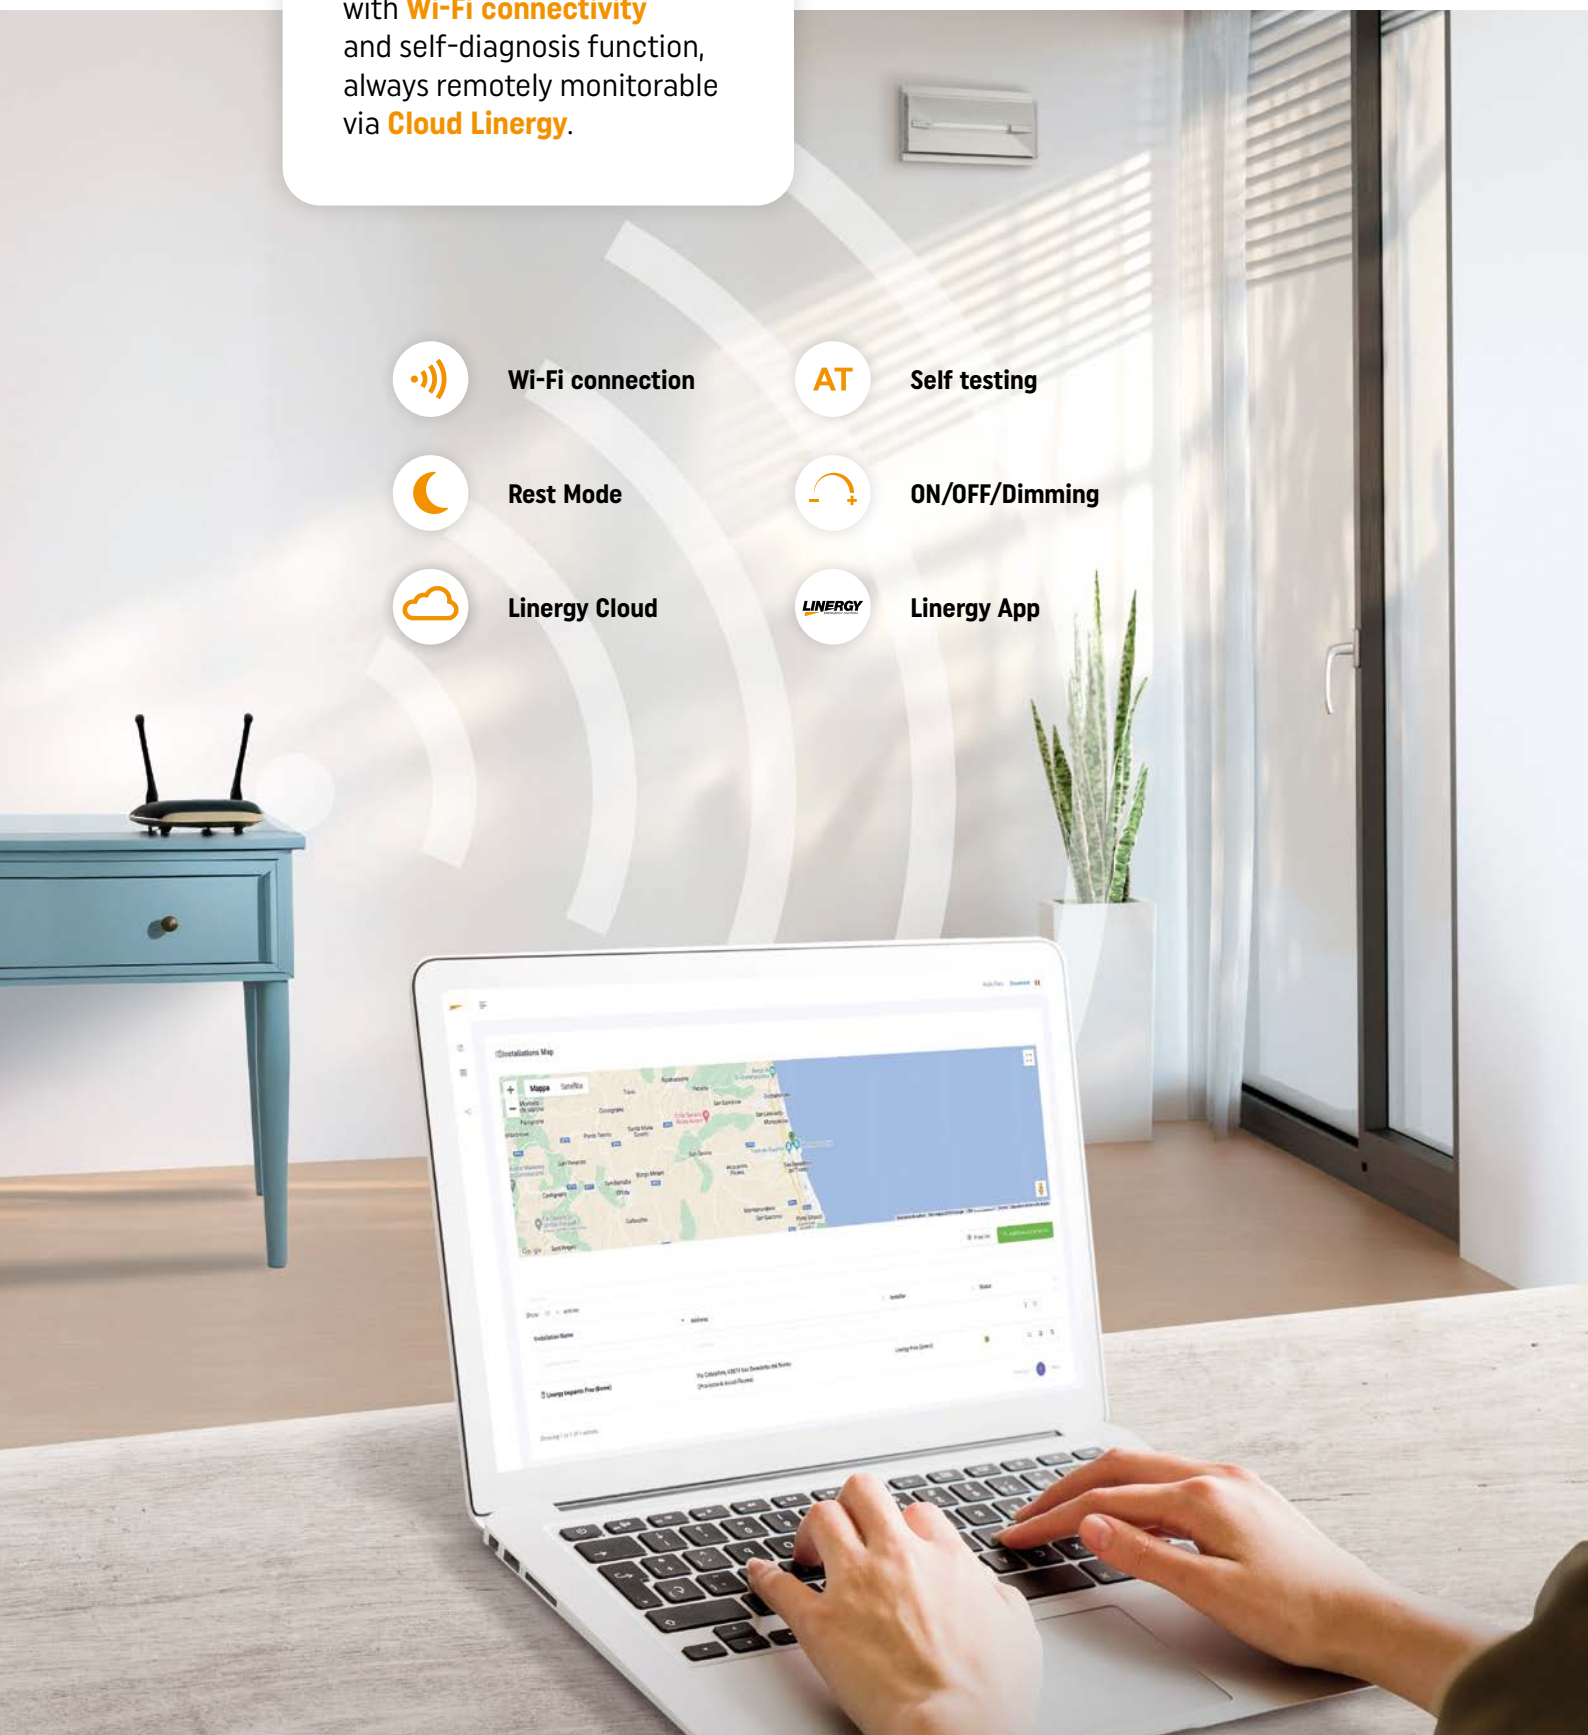

EVOLUTION OF ENERGY TEST DEVICES

UP TO
(50)
DEVICES
for each SSID



New IoT function in self testing devices: test results in Cloud



Monitoring system with **Wi-Fi communication** without any central unit



Remote management of your plant is possible via **App Spy manager** or **Cloud Linergy** with the same functionality as a control unit

CONNECT LUMINAIRES



Prodigy



Prodigy XL



Cristal Evo



Cristal Wall



Viald Evo



Viald High



Viald IP65



Astra



Lyra Evo



Wafer





Arya
SMART DEVICE



Spy Manager App

Free app dedicated to monitor the status of Emergency Systems.

- 1 Stand-alone devices with self-diagnosis function and Wi-Fi connectivity for sending results to the Linergy Cloud server and app Spy Manager

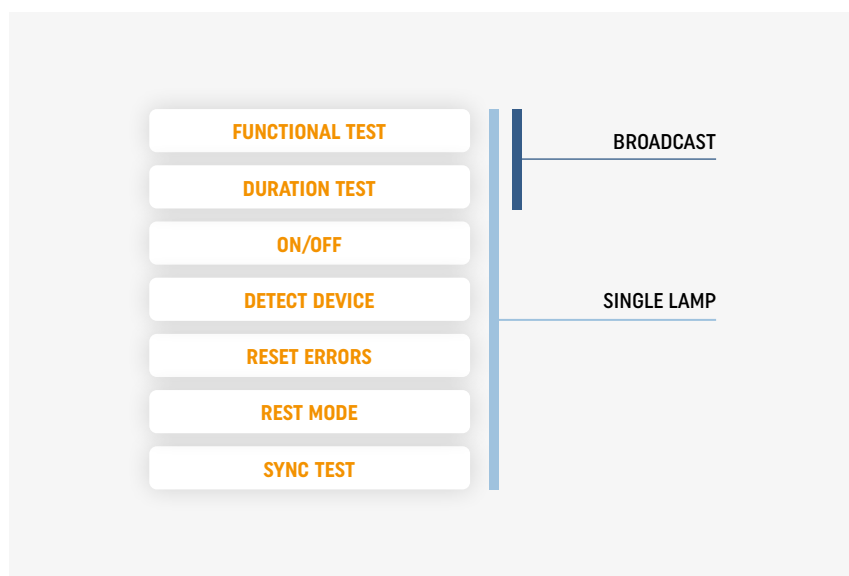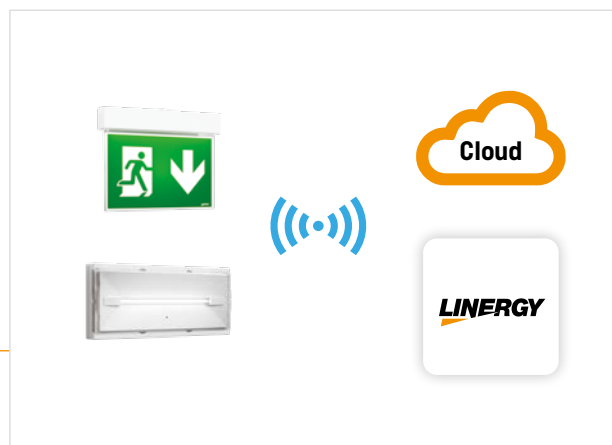


- 2 Start several commands remotely

MASTER DEVICE

During the installation phase of the system, one device is configured by the user as the **Master**. This device creates a **Mesh communication network** with the other units in the system.

Once the internet network is configured within the Master lamp, the system will begin sending data to the Linergy Cloud via the router.

At this point, all devices are aware of the reference internet network, and the system will automatically assign the Master role to the device with the strongest signal.

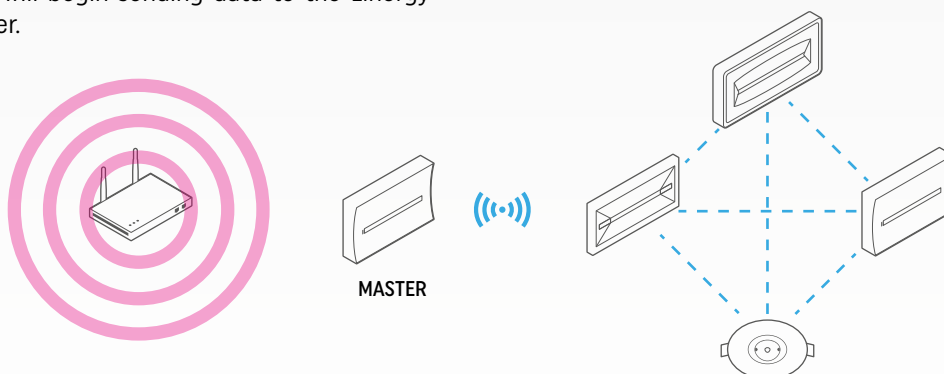

3 Constant monitoring of the health status

- Duration test result
- Functional test result
- Communication

4 Selectable battery duration of the luminaires in the start-up phase

1h/1,5h/2h/3h 




COMPLETE RANGE FOR EVERY TYPE OF INSTALLATION



Retail
luminaires



Signalling
luminaires



Recessed
luminaires



Industrial
sector

Arya

CONNECT & SMART DEVICE



IP20

IP65

It fits perfectly
into every environment.
It furnishes with simplicity
and refinement.



It takes care of you and your space



Dedicated App



Equipped with special ambient sensors



Wi-Fi connectivity



And it's an emergency luminaire too

1 Possibility of day and time setting

2 Possibility of enabling push notifications to be alerted

3 Possibility of setting minimum and maximum comfort thresholds for each environmental parameter detected



ENVIRONMENTAL PARAMETERS



TEMPERATURE



HUMIDITY



AIR QUALITY



LUMINOSITY

3 VERSIONS AVAILABLE

CONNECT

SMART

SMART PLUS

Wi-Fi connectivity



Self-diagnosis



Functional / duration tests / ON-OFF / Dim / Rest Mode



Linery's Cloud and Spy Manager App



Wi-Fi connectivity for up to 50 devices for each SSID



Arya App for remote management



Detect environmental parameters



Clean contact



Arya range




WHITE

	PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
CONNECT	AR 2901	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 2902	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 2903	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04
SMART	AR 3001	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 3002	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 3003	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04
SMART PLUS	AR 3101	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 3102	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 3103	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04



BLACK

	PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
CONNECT	AR 2904	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 2905	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 2906	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04
SMART	AR 3004	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 3005	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 3006	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04
SMART PLUS	AR 3104	2,3	1/1,5/2/3 h	NM / M	250/250/250/165	250	B087	LiFeP04
	AR 3105	3,7	1/1,5/2/3 h	NM / M	400/400/400/265	400	B102	LiFeP04
	AR 3106	4,8	1/1,5/2/3 h	NM / M	600/600/600/400	600	B102	LiFeP04

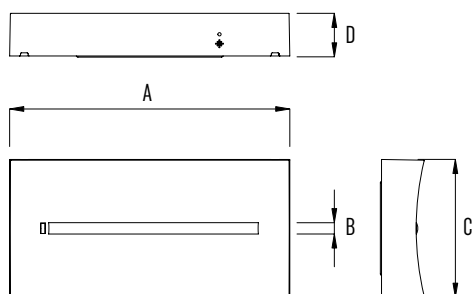

A=240 mm B=10 mm C=118 mm D=37 mm



Easy installation

Composed of just **2 parts**




AVAILABLE ACCESSORIES



A310
Adapter for power rail



A005
Busbar kit



A047
Kit for flag style fastening



A327
Medium rain protection in stainless steel



A092
Mounting bracket for 45° mount



A014
Protection grid in galvanized metal



Available on the
App Store

GET IT ON
Google Play

Arya App

App dedicated to set and display
the environmental parameters



Connect devices



PRODIGY

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
PR 2901	0,3	1/ 1,5 /2/3 h	NM	120/ 120 / 120/120		B087	LiFeP04
PR 2902	3,6	1 /1,5/2/3 h	NM / M	550 /365/275/185	550	B102	LiFeP04



PRODIGY XL

IP42

IP65

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
PX 2901	0,2	1/ 1,5 /2/3 h	NM	1055/ 1055 /790/525		B133	LiFeP04
PX 2902	7,1	1 /1,5/2/3 h	NM / M	770 /515/385/255	770	B105	LiFeP04
PX 2903	7,1	1/1,5/2/ 3 h	NM / M	770/770/770/ 770	770	B133	LiFeP04
PZ 2901	0,2	1/ 1,5 /2/3 h	NM	1055/ 1055 /790/525		B133	LiFeP04
PZ 2902	7,1	1 /1,5/2/3 h	NM / M	770 /515/385/255	770	B105	LiFeP04
PZ 2903	7,1	1/1,5/2/ 3 h	NM / M	770/770/770/ 770	770	B133	LiFeP04



CRISTAL EVO

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
CE 2901	0,2	1/1,5/ 2 /3 h	NM	1620/1620/ 1620 /1080		B135	LiFeP04
CE 2902	7,4	1 /1,5/2/3 h	NM / M	770 /515/385/255	770	B105	LiFeP04
CE 2903	9,2	1 /1,5/2/3 h	NM / M	1055 /705/525/350	1055	B132	LiFeP04
CE 2904	7,4	1/1,5/2/ 3 h	NM / M	770/770/770/ 770	770	B135	LiFeP04



CRISTAL WALL

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
CW 2901	0,2	1/1,5/ 2 /3 h	NM	1200/1200/ 1200 /800		B135	LiFeP04
CW 2902	7,4	1 /1,5/2/3 h	NM / M	615 /410/305/205	615	B105	LiFeP04
CW 2903	9,2	1 /1,5/2/3 h	NM / M	780 /520/390/260	780	B132	LiFeP04
CW 2904	7,4	1/1,5/2/ 3 h	NM / M	615/615/615/ 615	615	B135	LiFeP04



VIALED IP65

WHITE

GREY

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
VA 2901	0,7	1/1,5/ 2 /3 h	NM	750/750/ 750 /500		B123	LiFeP04
VA 2902	8,9	1/1,5/ 2 /3 h	NM / M	750/750/ 750 /500	750	B123	LiFeP04
VA 2903	0,7	1/1,5/ 2 /3 h	NM	750/750/ 750 /500		B123	LiFeP04
VA 2904	8,9	1/1,5/ 2 /3 h	NM / M	750/750/ 750 /500	750	B123	LiFeP04



Ø 85 mm

WHITE
GREY

VIALED EVO

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
VE 2901	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04
VE 2902	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04

Ø 68 mm

WHITE
GREY

VE 2903	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04
VE 2904	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04

59x59 mm

WHITE
GREY

VE 2905	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04
VE 2906	5,7	1/1,5/ 2 /3 h	NM / M	450/450/ 450 /300	450	B102	LiFeP04



Ø 85 mm

WHITE
GREY

VIALED HIGH

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	FLUX AVERAGE NM (LM)	FLUX M (LM)	BATTERY CODE	BATTERY TYPE
VH 2901	5,7	1/1,5/ 2 /3 h	NM / M	440/440/ 440 /295	450	B102	LiFeP04
VH 2902	5,7	1/1,5/ 2 /3 h	NM / M	440/440/ 440 /295	450	B102	LiFeP04

Ø 68 mm

WHITE
GREY

VH 2903	5,7	1/1,5/ 2 /3 h	NM / M	440/440/ 440 /295	450	B102	LiFeP04
VH 2904	5,7	1/1,5/ 2 /3 h	NM / M	440/440/ 440 /295	450	B102	LiFeP04



WAFER

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	VISIBILITY	BATTERY CODE	BATTERY TYPE
WR 2901	3,3	1/1,5/ 2 /3 h	NM / M	30m	B102	LiFeP04



LYRA EVO

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	VISIBILITY	BATTERY CODE	BATTERY TYPE
LV 2901	2,4	1/1,5/ 2 /3 h	NM / M	22m	B087	LiFeP04
LV 2902	2,4	1/1,5/ 2 /3 h	NM / M	32m	B087	LiFeP04



ASTRA

PRODUCT CODE	ABSORP. (W)	DURATION	TYPE NM / M	VISIBILITY	BATTERY CODE	BATTERY TYPE
AS 2901	2,9	1/1,5/ 2 /3 h	NM / M	22m	B087	LiFeP04
AS 2902	2,9	1/1,5/ 2 /3 h	NM / M	32m	B087	LiFeP04

Web tools



System setup and programming
Web Platform



Monitoring and maintenance
of Emergency System



End-user management
App Arya



LINERGY srl
via California, 21
63066 Grottammare (AP) - Italy

Tel. +39 0735 5974
www.linergy.it
info@linergy.it

BRANCH
LINERGY BENELUX sa
Doornveld, 21 - 1731 Zellik - Belgique

Tel. +32 2 4661066 - Fax +32 2 4661033
www.linergy.be
info@linergy.be